



Lighting design Co. & LED LUMINAIRES


Indoor products

Downlights & Recessed Trimlesses


چراغ های سقفی توکار DOWN LIGHT

چراغ های سقفی توکار دامنه گسترده ای از محصولات را برای نورپردازی محیط های مختلف با شرایط متفاوت در برمیگیرد. عدم ایجاد خیرگی به دلیل تو رفتگی منبع نور، و نیز سطح تیره رفلکتور داخل چراغ و هم چنین تنوع در فرم ظاهری برای هماهنگی با محیطها و کاربری های مختلف، از ویژگی های برجسته این نوع محصولات است.

در این سری از نسل جدید، ال ای دی هایی با راندمان بالا استفاده شده است که این امر به ایجاد نورپردازی دلنشین تر با طیف کامل رنگ های قابل تشخیص (CRI بالا) و کاهش انرژی انجامیده است.

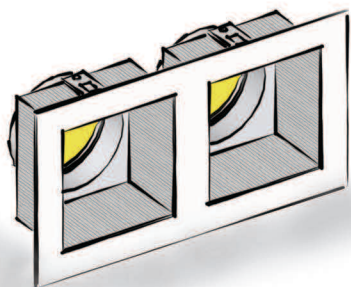


پوتیک لومیر، مجتمع تجاری پالادیوم، تهران




DARK LIGHT-2L

Code: DL 2L
 Luminous flux: 1800 lm
 Color temperature: 3000K, 4000K
 Wattage: 20 W
 Voltage: 220 VAC
 CRI>80
 Installation: Recessed
 Cut Size: ∇ 265X95 mm

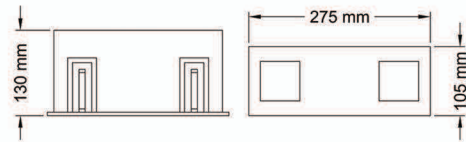


Color:




DARK LIGHT-2SP (SPEAKER BUILT IN)

Code: DL 2SP
 Luminous flux: 1800 lm
 Color temperature: 3000K, 4000K
 Wattage: 20 W
 Voltage: 220 VAC
 CRI>80
 Installation: Recessed
 Cut Size: ∇ 265X95 mm

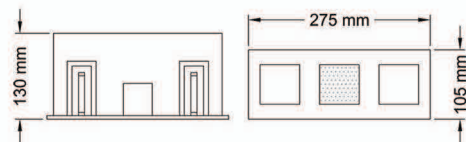


Color:




DARK LIGHT-109S

Code: DL109S
 Luminous flux: 900 lm
 Color temperature: 3000K, 4000K
 Wattage: 10 W
 Voltage: 220 VAC
 CRI>80
 Installation: Recessed
 Cut size: ∇ 95X95 mm

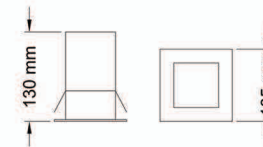

Color:




DARK LIGHT-105S

Code: DL105S
 Luminous flux: 540 lm
 Color temperature: 3000K, 4000K
 Wattage: 6 W
 Voltage: 220 VAC
 CRI>80
 Installation: Recessed
 Cut Size: ∇ 75X75 mm



Color:

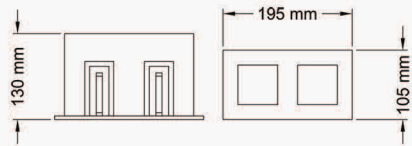

DARK LIGHT-2

Code: DL 2
 Luminous flux: 1800 lm
 Color temperature: 3000K, 4000K
 Wattage: 20 W
 Voltage: 220 VAC
 CRI>80
 Installation: Recessed
 Cut Size: ∇ 175X95 mm



Color:




DARK LIGHT-105 CW


Code: DL105CW
 Luminous flux: 540 lm
 Color temperature: 3000K, 4000K
 Wattage: 6 W
 Voltage: 220 VAC
 CRI>80
 Installation: Recessed
 Cut Size: ∇ Ø73 mm



Color:

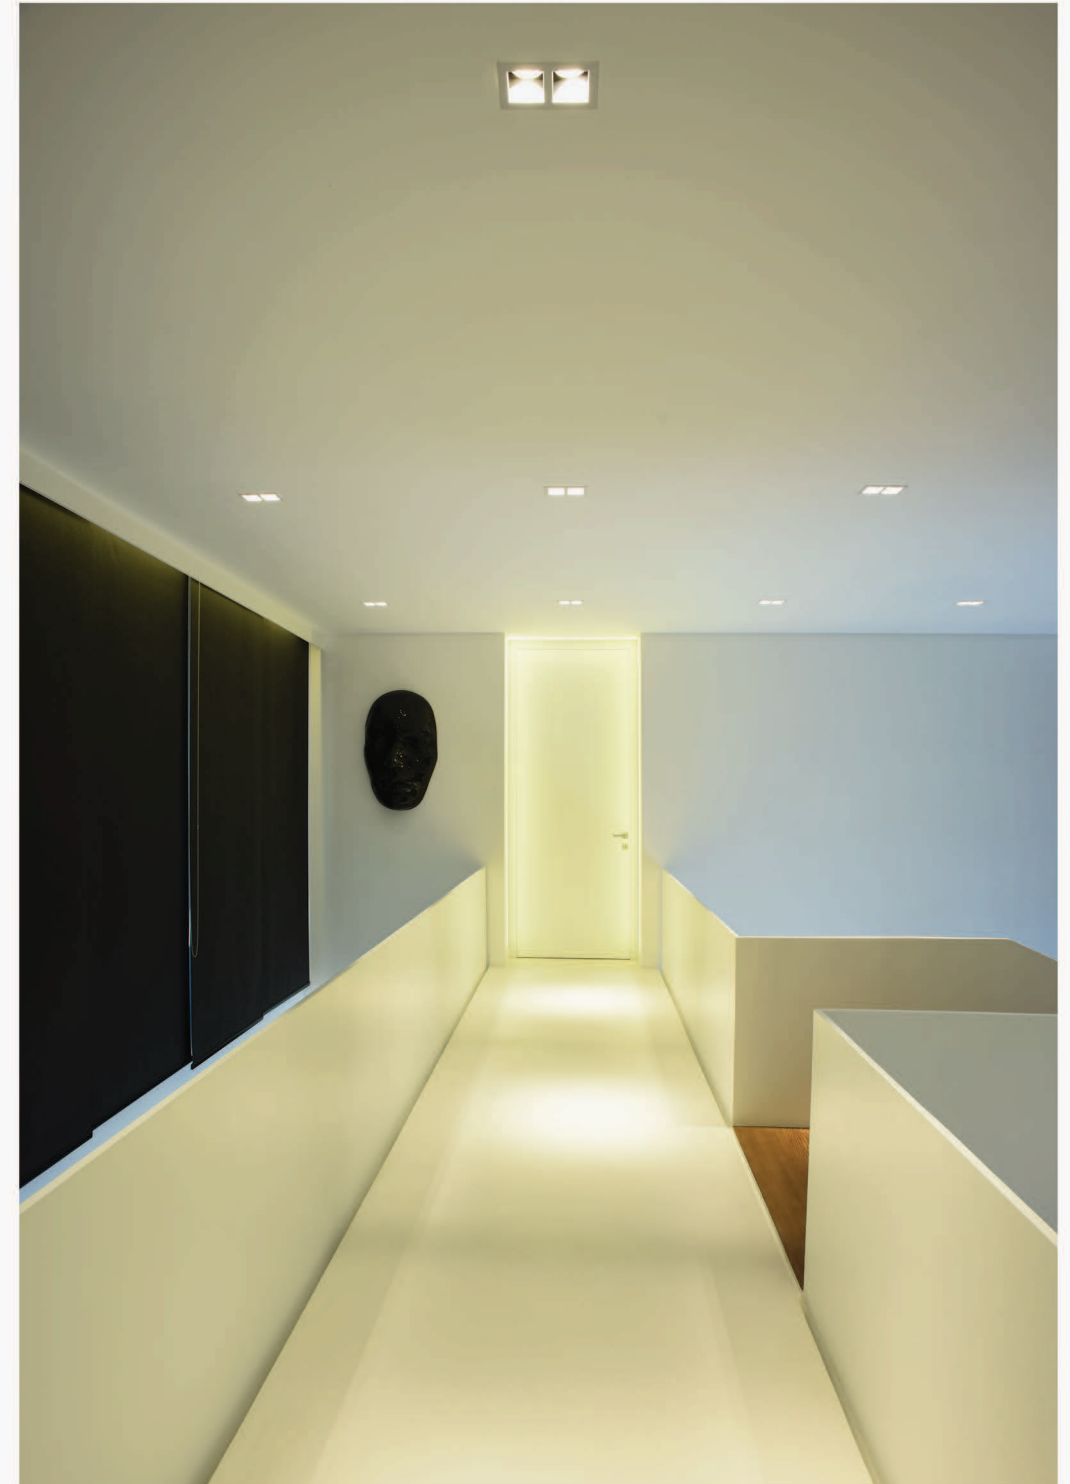

DARK LIGHT-3

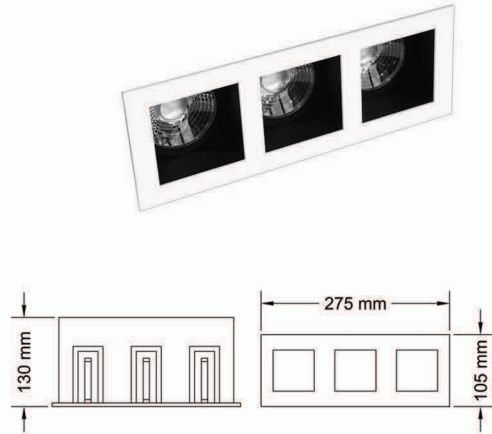


Code: DL3
 Luminous flux: 2700 lm
 Color temperature: 3000K, 4000K
 Wattage: 30 W
 Voltage: 220 VAC
 CRI>80
 Installation: Recessed
 Cut Size: ∇ 265X95 mm



Color:


DARK LIGHT-4

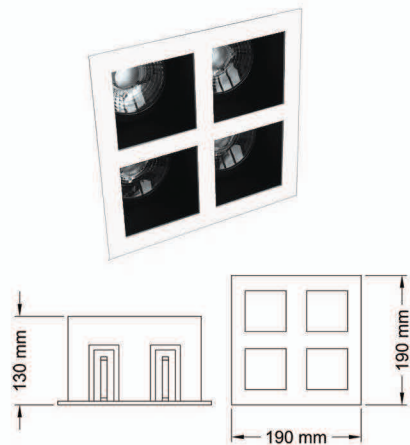


Code: DL4
 Luminous flux: 3600 lm
 Color temperature: 3000K, 4000K
 Wattage: 40 W
 Voltage: 220 VAC
 CRI>80
 Installation: Recessed
 Cut Size: ∇ 175X175 mm



Color:

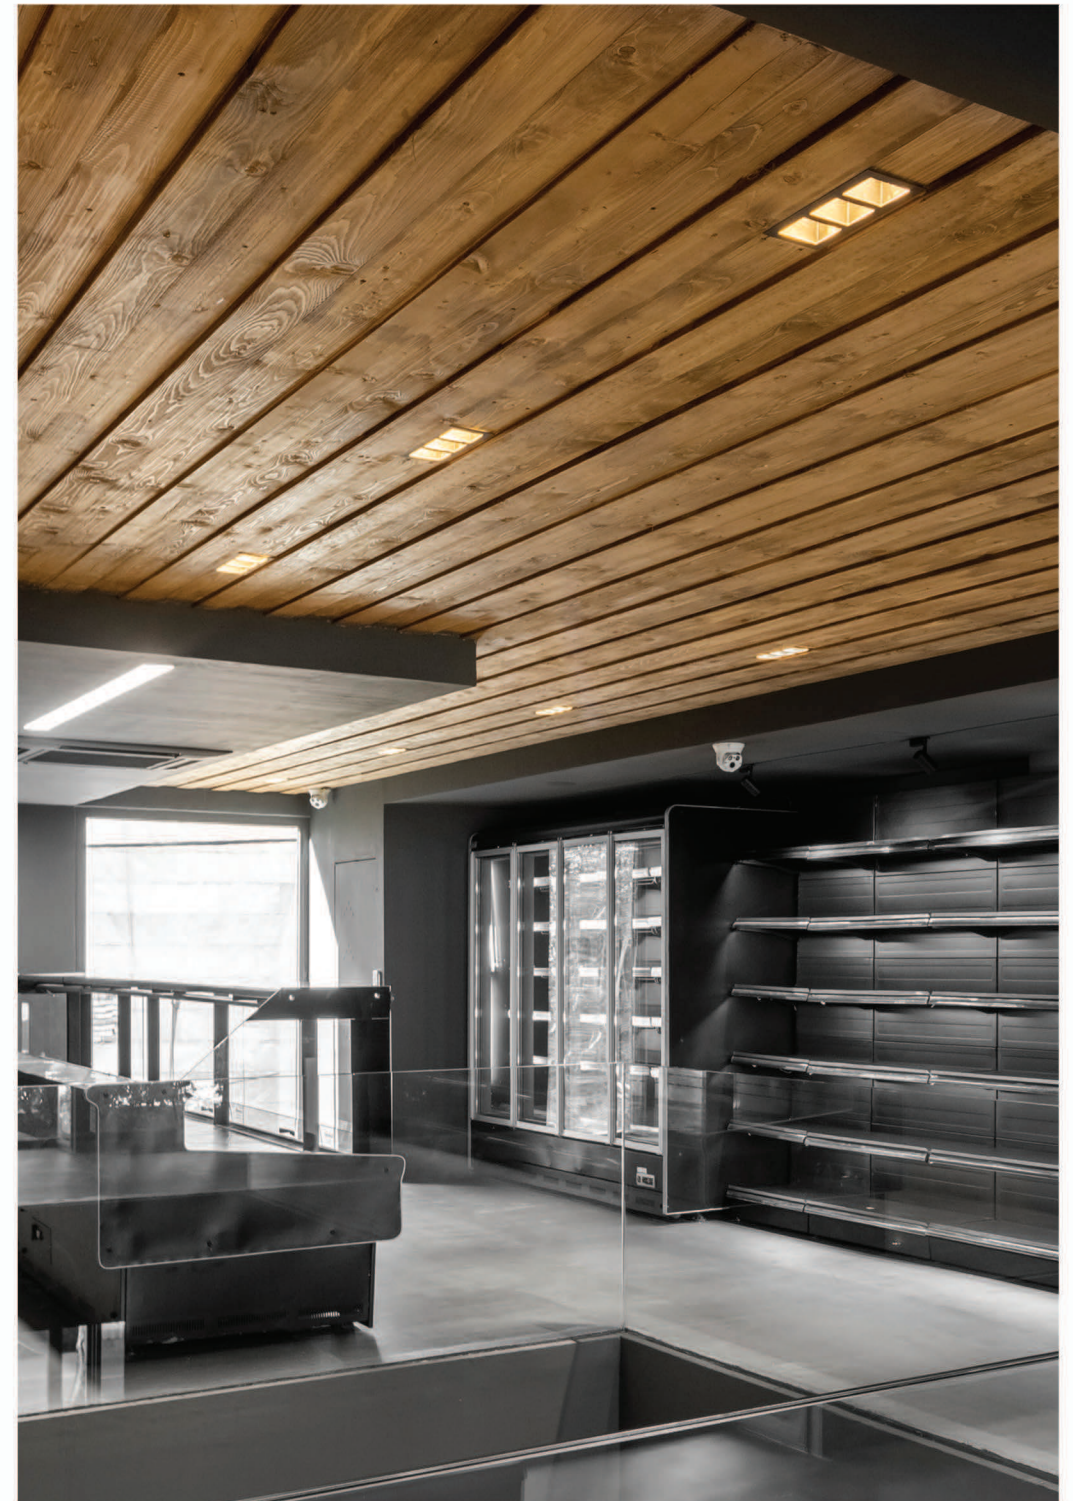

DARK LIGHT-109M

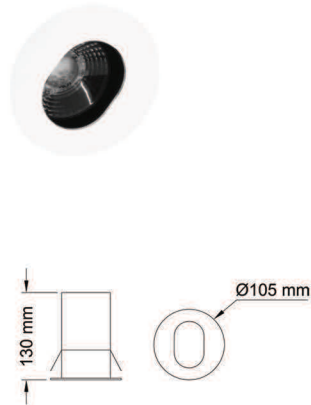


Code: DL109M
 Luminous flux: 900 lm
 Color temperature: 3000K, 4000K
 Wattage: 10 W
 Voltage: 220 VAC
 CRI>80
 Installation: Recessed
 Cut Size: \varnothing 95mm



Color:

DARK LIGHT-105M

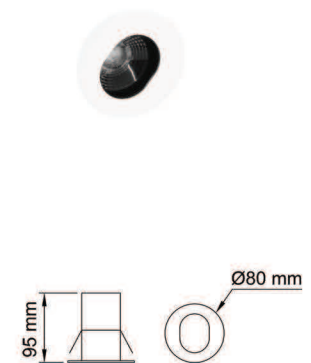


Code: DL105M
 Luminous flux: 540 lm
 Color temperature: 3000K, 4000K
 Wattage: 6 W
 Voltage: 220 VAC
 CRI>80
 Installation: Recessed
 Cut Size: \varnothing 70mm



Color:

DARK LIGHT-109C

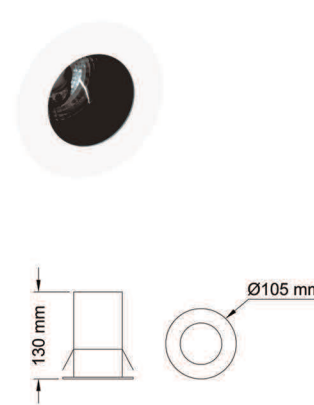


Code: DL109C
 Luminous flux: 900 lm
 Color temperature: 3000K, 4000K
 Wattage: 10 W
 Voltage: 220 VAC
 CRI>80
 Installation: Recessed
 Cut Size: \varnothing 95 mm



Color:


DARK LIGHT-105C

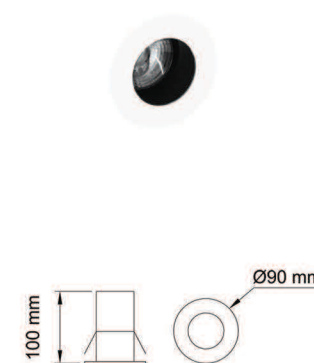

Code: DL105C
 Luminous flux: 540 lm
 Color temperature: 3000K, 4000K
 Wattage: 6 W
 Voltage: 220 VAC
 CRI>80
 Installation: Recessed
 Cut Size: \varnothing 75 mm



Color:

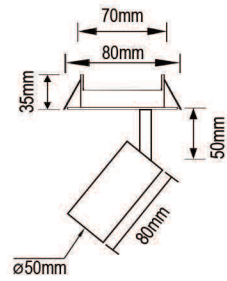


HERA- 002

Code: H 002
 Luminous flux: 630/1080 lm
 Color temperature: 3000K, 4000K
 Wattage: 7 W
 Voltage: 220 VAC
 CRI>80
 Installation: Recessed
 Body: Aluminum
 Cut Size: $\varnothing 70$ mm



Body Color:

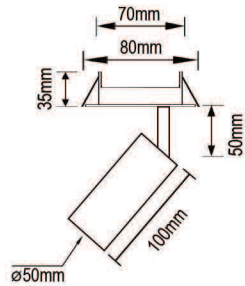


HERA- 002

Code: H 002
 Luminous flux: 630/1080 lm
 Color temperature: 3000K, 4000K
 Wattage: 12 W
 Voltage: 220 VAC
 CRI>80
 Installation: Recessed
 Body: Aluminum
 Cut Size: $\varnothing 70$ mm




Body Color:

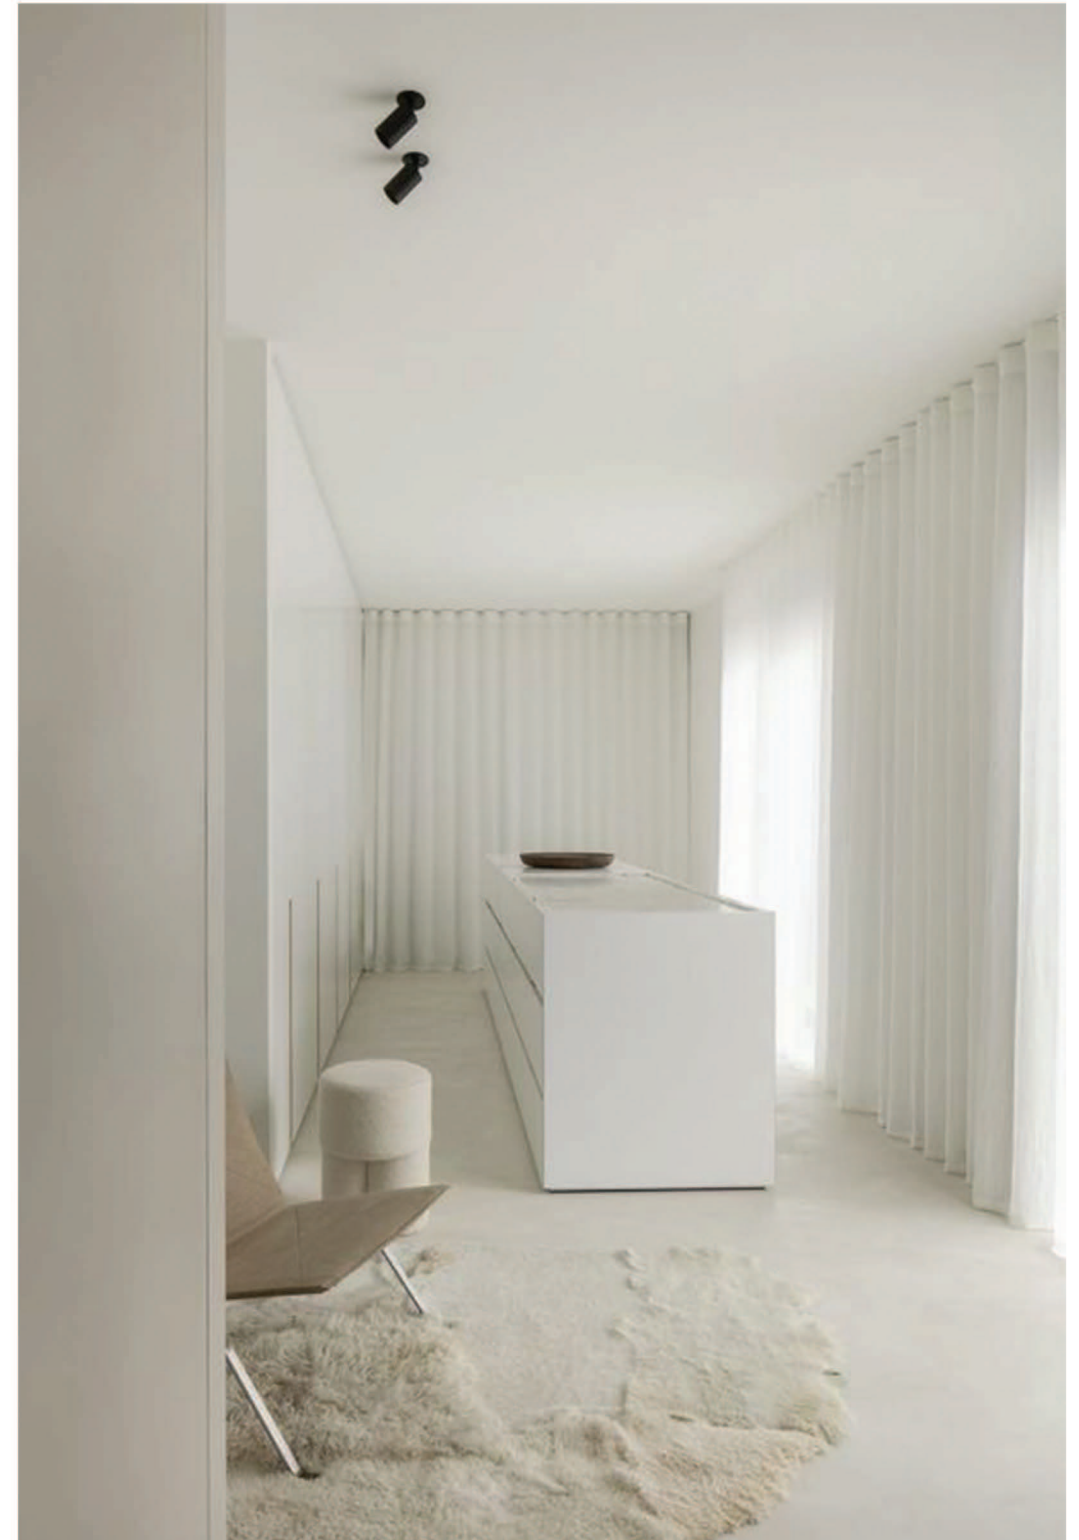

HERA-006




Code: H 006
 Luminous flux: 2800 lm
 Color temperature: 3000K, 4000K
 Wattage: 24 W
 Voltage: 220 VAC
 CRI>80
 Installation: Recessed
 Body: Aluminum
 Cut Size: ∇ 40X275 mm

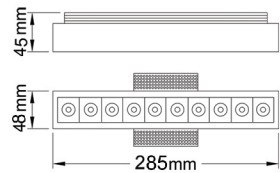

HERA-1406



Code: H 1406
 Luminous flux: 540 lm
 Color temperature: 3000K, 4000K
 Wattage: 6 W
 Voltage: 220 VAC
 CRI>80
 Installation: Recessed
 Body: Aluminum
 Cut Size: ∇ \varnothing 70 mm

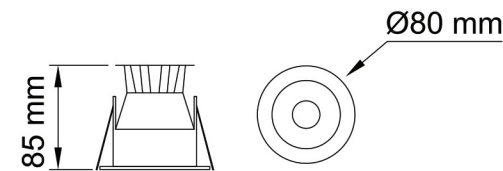


Color:




LED PANEL (9X9 Cm)

Code: LP 9x9
 Luminous flux: 695 lm
 Color temperature: 3000K, 4000K, 6000K
 Wattage: 8 W
 Voltage: 220 VAC
 CRI>80
 Installation: Recessed
 Body: Aluminum
 Cut Size: ∇ 70X70mm

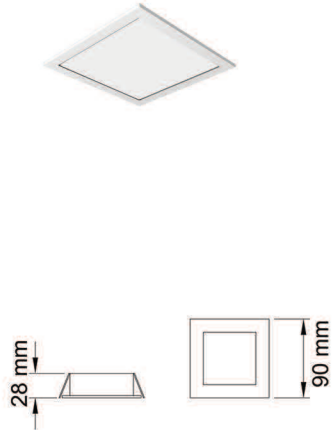


LED PANEL (12X12 Cm)

Code: LP 12x12
 Luminous flux: 1338 lm
 Color temperature: 3000K, 4000K, 6000K
 Wattage: 16 W
 Voltage: 220 VAC
 CRI>80
 Installation: Recessed
 Body: Aluminum
 Cut Size: ∇ 99X99 mm

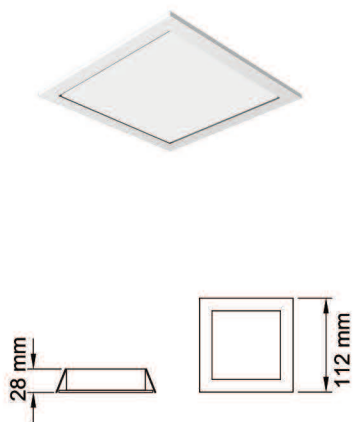


LIANA 505 P


Code: L505P
 Luminous flux: 450 lm
 Color temperature: 3000K, 6000K
 Wattage: 5 W
 Voltage: 220 VAC
 CRI>80
 Installation: Recessed
 Body: Aluminum
 Cut Size: ∇ \varnothing 45 mm

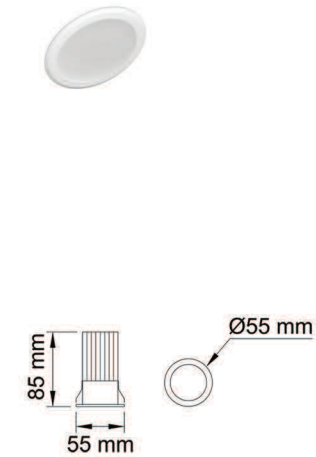

MACROSOL-N


Code: Macrosol-n
 Luminous flux: 210 lm
 Color temperature: 3000K, 4000K, 6500K
 Wattage: 3 W
 Voltage: 220 VAC
 CRI>80
 Installation: Recessed
 Body: Aluminum
 Cut Size: ∇ \varnothing 33 mm

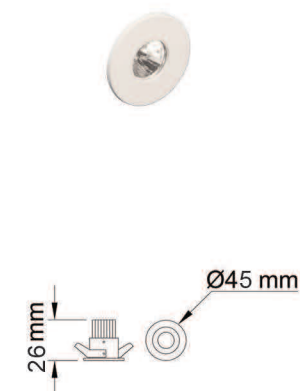

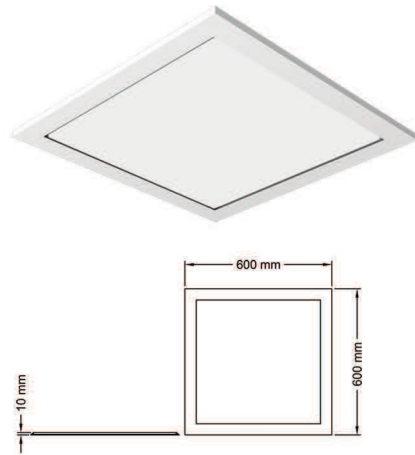


LED PANEL (60X60 Cm)

Code: LP 60x60
 Luminous flux: 3980 lm
 Color temperature: 3000K, 4000K, 6000K
 Wattage: 48 W
 Voltage: 220 VAC
 CRI>80
 Installation: Recessed
 Body: Aluminum

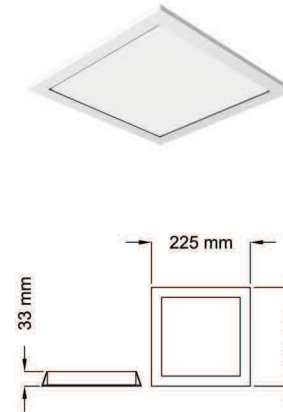


LED PANEL (22X22 Cm)

Code: LP 22x22
 Luminous flux: 1980 lm
 Color temperature: 3000K, 4000K, 6000K
 Wattage: 22 W
 Voltage: 220 VAC
 CRI>80
 Installation: Recessed
 Body: Aluminum
 Cut Size: 207X207 mm

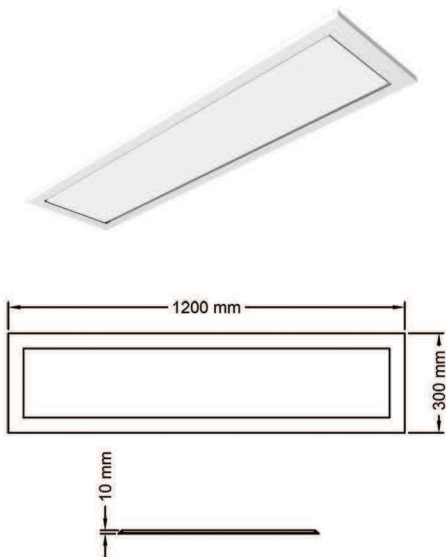

LED PANEL (30X120 Cm)

Code: LP 30x120
 Luminous flux: 3980 lm
 Color temperature: 3000K, 4000K, 6000K
 Wattage: 48 W
 Voltage: 220 VAC
 CRI>80
 Installation: Recessed
 Body: Aluminum

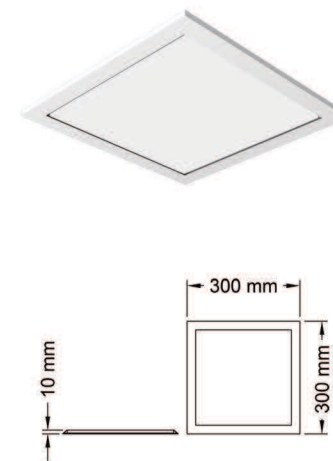

LED PANEL (30X30 Cm)

Code: LP 30x30
 Luminous flux: 1660 lm
 Color temperature: 3000K, 4000K, 6000K
 Wattage: 20 W
 Voltage: 220 VAC
 CRI>80
 Installation: Recessed
 Body: Aluminum




چراغ های سقفی توکار - بدون لبه

ایجاد فرم زیبا و هماهنگ با طراحی محیط، بدون دیده شدن لبه چراغ، به دست آوردن نوری زیبا، دلنشین و بدون ایجاد خیرگی از ویژگی های برجسته این دسته چراغ هاست. پس از اتمام مراحل نصب درزهای موجود بین چراغ و سقف کاملا پوشانده شده و چراغ به عنوان قسمتی از سقف دیده خواهد شد. همچنین در صورت نیاز، منبع نور (لامپ) به راحتی قابل تعویض است.

Indoor products

Downlight & recessed Trimless



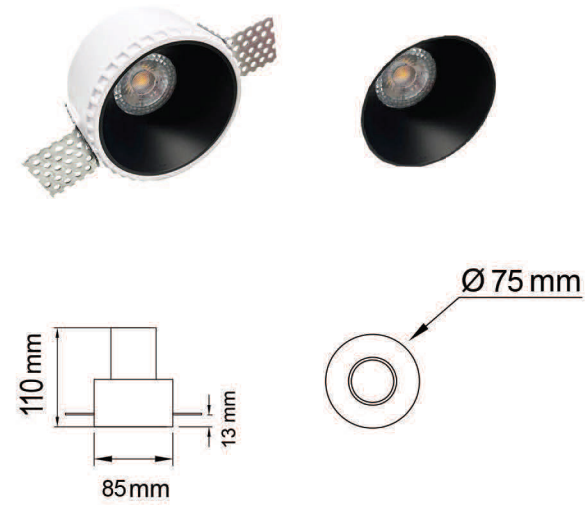

TRIMLESS-001

Code: TR001
 Luminous flux: 540 lm
 Color temperature: 3000K, 4000K
 Wattage: 7 W
 Voltage: 220 VAC
 CRI>80
 Installation: Recessed
 Body: Aluminum
 Cut Size: \varnothing 85 mm



Color:




TRIMLESS-002

Code: TR002
 Luminous flux: 540 lm
 Color temperature: 3000K, 4000K
 Wattage: 6 W
 Voltage: 220 VAC
 CRI>80
 Installation: Recessed
 Body: Aluminum
 Cut Size: 175X175 mm



Color:

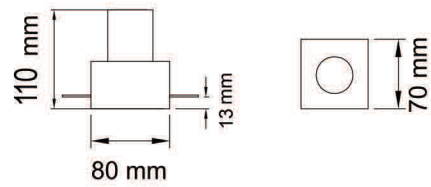


TRIMLESS-003

Code: TR003
 Luminous flux: 540 lm
 Color temperature: 3000K, 4000K
 Wattage: 7 W
 Voltage: 220 VAC
 CRI>80
 Installation: Recessed
 Body: Aluminum
 Cut Size: 80X80 mm




Color:

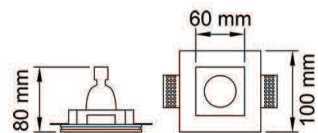


TRIMLESS-004

Code: TR004
 Luminous flux: 540 lm
 Color temperature: 3000K, 4000K
 Wattage: 7 W
 Voltage: 220 VAC
 CRI>80
 Installation: Recessed
 Body: Gybsum
 Cut Size: 103X103 mm

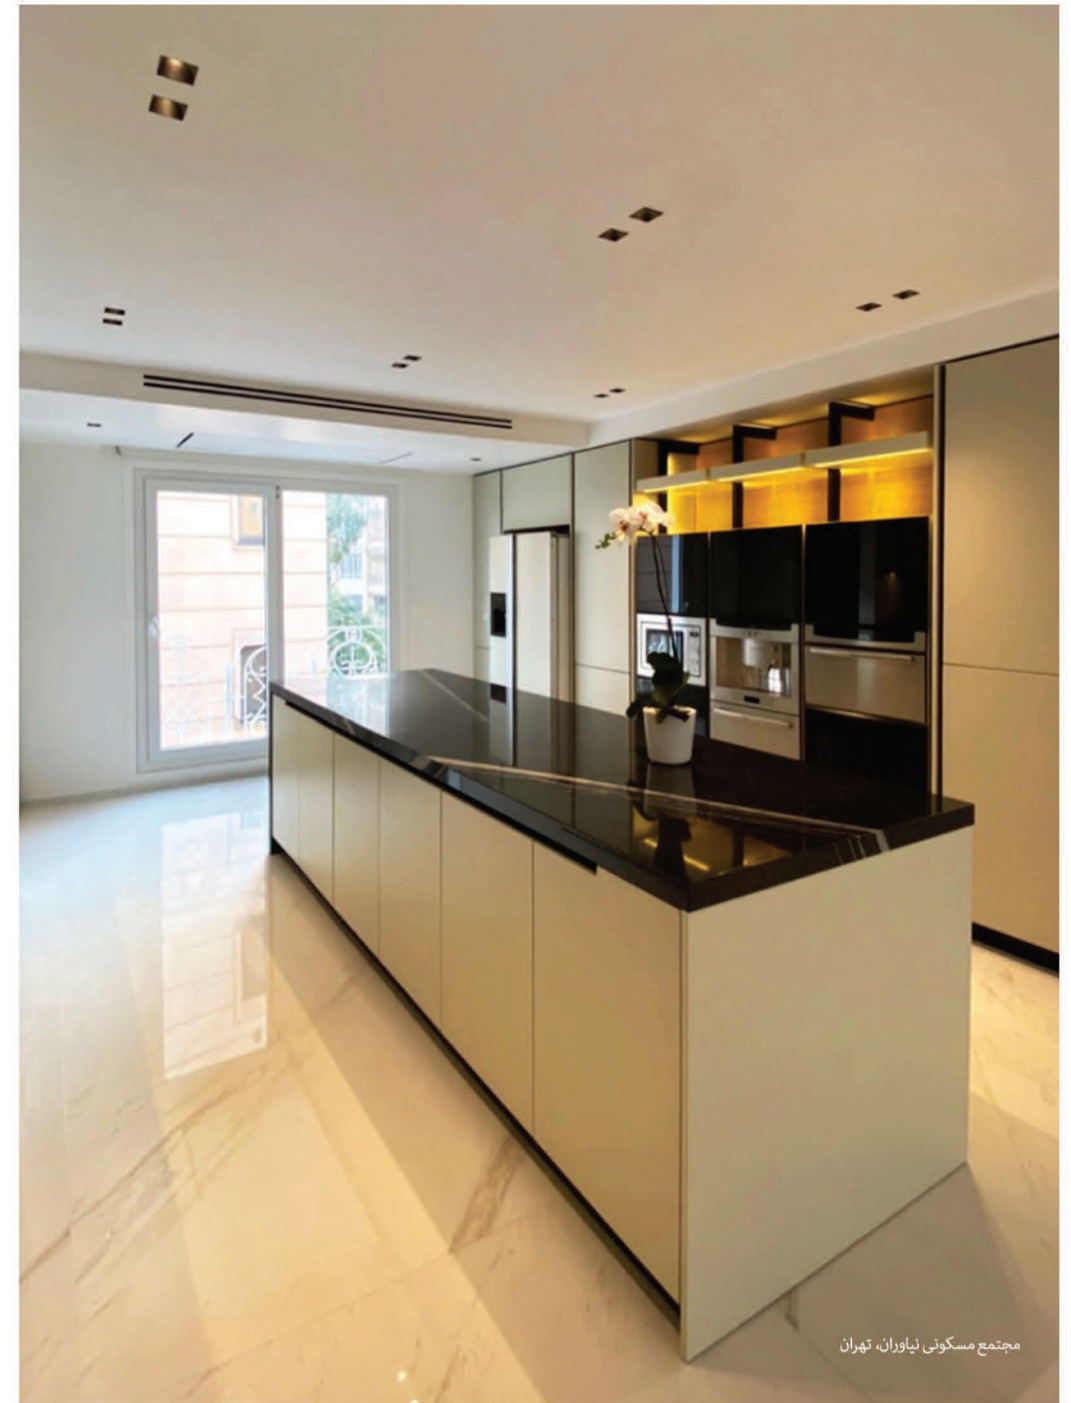


مجتمع مسكونی نیاوران، تهران

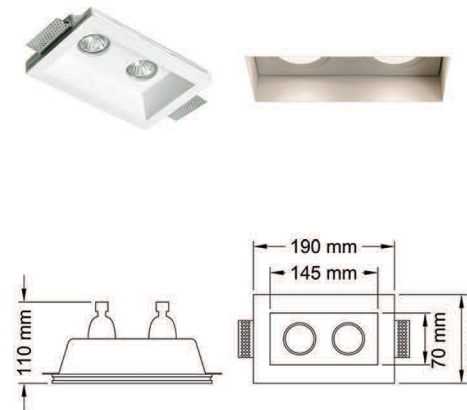

TRIMLESS-005

Code: TR005
 Luminous flux: 1080 lm
 Color temperature: 3000K, 4000K
 Wattage: 14 W
 Voltage: 220 VAC
 CRI>80
 Installation: Recessed
 Body: Gybsum
 Cut Size: 193X123mm

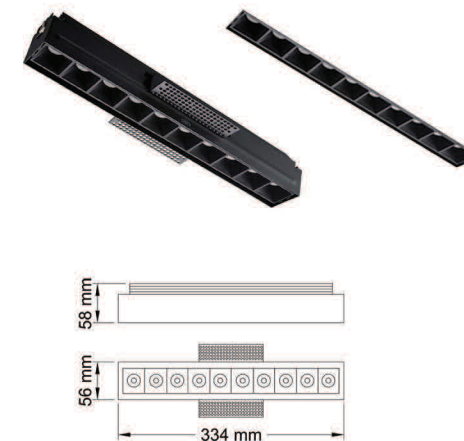

TRIMLESS-006


Code: TR006
 Luminous flux: 1950 lm
 Color temperature: 3000K, 4000K
 Wattage: 30 W
 Voltage: 220 VAC
 CRI>90
 Installation: Recessed
 Body: Gybsum
 Cut Size: 327X47mm






TRIMLESS-007

Code: TR007
 Luminous flux: 540 lm
 Color temperature: 3000K, 4000K
 Wattage: 7 W
 Voltage: 220 VAC
 CRI>80
 Installation: Recessed
 Body: Gybsum
 Cut Size: \sphericalangle 123X123mm

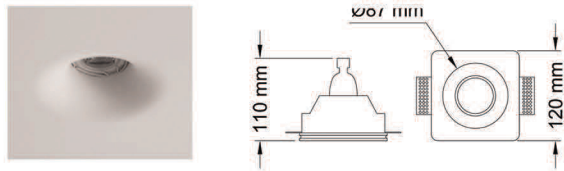

TRIMLESS-008



Code: TR008
 Luminous flux: 540 lm
 Color temperature: 3000K, 4000K
 Wattage: 7 W
 Voltage: 220 VAC
 CRI>80
 Installation: Recessed
 Body: Gybsum
 Cut Size: \sphericalangle 123X123mm

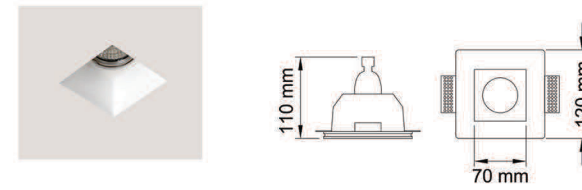



TRIMLESS-009


Code: TR009
 Luminous flux: 540 lm
 Color temperature: 3000K, 4000K, 6000K
 Wattage: 7 W
 Voltage: 220 VAC
 CRI>80
 Installation: Recessed
 Body: Gybsum
 Cut Size: \varnothing 383 mm

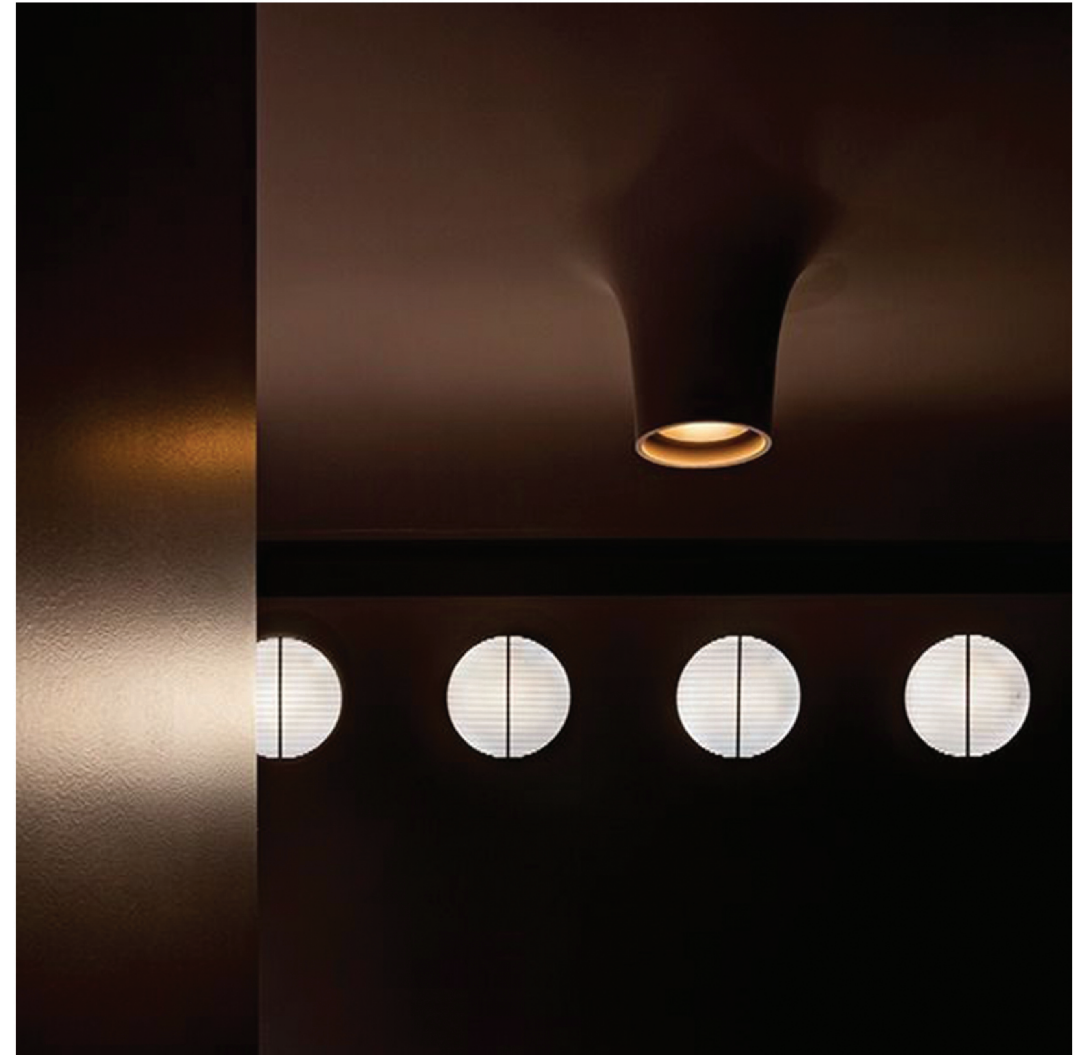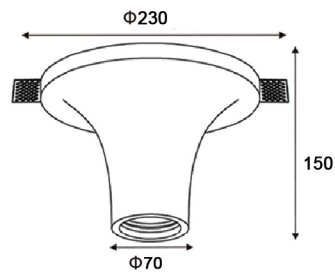





TRIMLESS-010

Code: TR010
 Luminous flux: 540 lm
 Color temperature: 3000K, 4000K
 Wattage: 7 W
 Voltage: 220 VAC
 CRI>80
 Installation: Recessed
 Body: Gybsum
 Cut Size: \sphericalangle 123X123mm

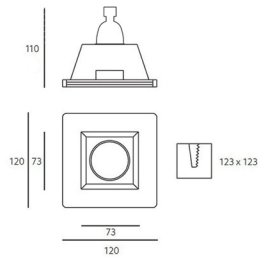


TRIMLESS-011

Code: TR011
 Luminous flux: 1080 lm
 Color temperature: 3000K, 4000K
 Wattage: 14 W
 Voltage: 220 VAC
 CRI>80
 Installation: Recessed
 Body: Gybsum
 Cut Size: \sphericalangle 217X120mm

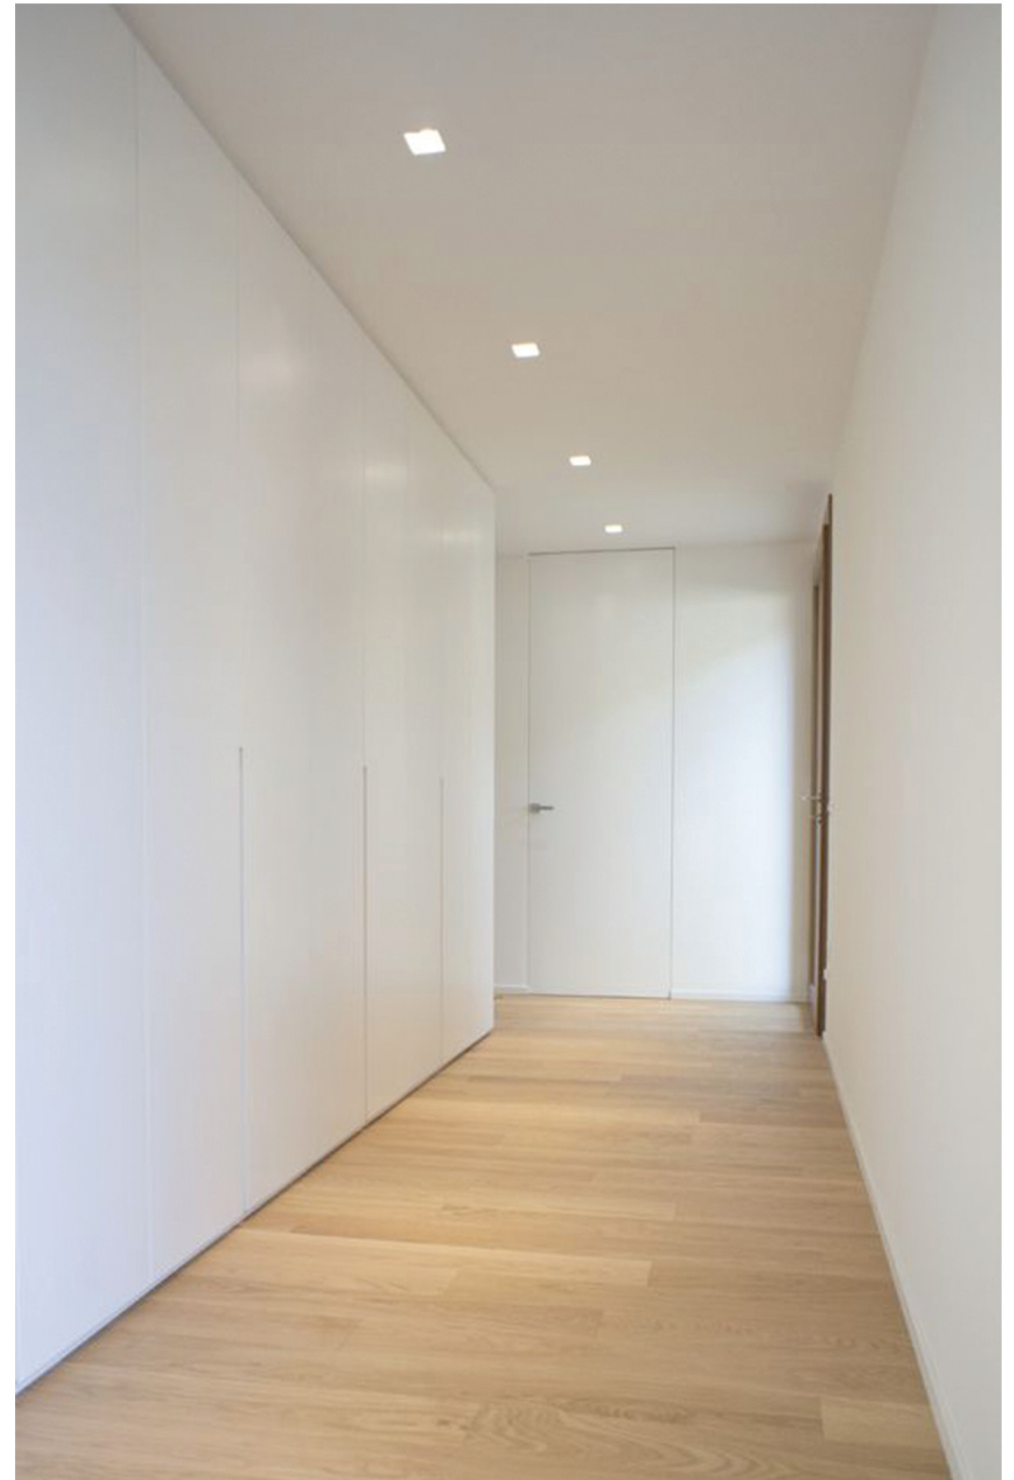

PANIZ-L-M

Code: p-l-M
 Luminous flux: 220 lm
 Color temperature: 3000K, 4000K
 Wattage: 3 W
 Voltage: 220 VAC
 Installation: Recessed
 Body: Gybsum
 Cut Size: ∇ 85X170mm

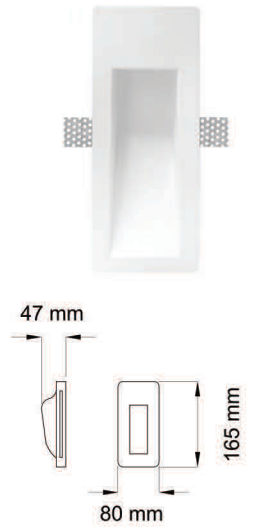

PANIZ-L-B

Code: p-l-B
 Luminous flux: 220 lm
 Color temperature: 3000K, 4000K
 Wattage: 3 W
 Voltage: 220 VAC
 Installation: Recessed
 Body: Gybsum
 Cut Size: ∇ 250X115mm



PANIZ-S-TR

Code: p-s-tr
 Luminous flux: 540 lm
 Color temperature: 3000K, 4000K
 Wattage: 6 W
 Voltage: 220 VAC
 CRI>80
 Installation: Recessed
 Body: Gybsum
 Cut Size: \varnothing 100X100mm

